



NOTE)
 MIN. BENDING RADIUS R=25
 LEAD RESISTANCE 0.04Ω/m
 COMPRESSION FITTING TYPE

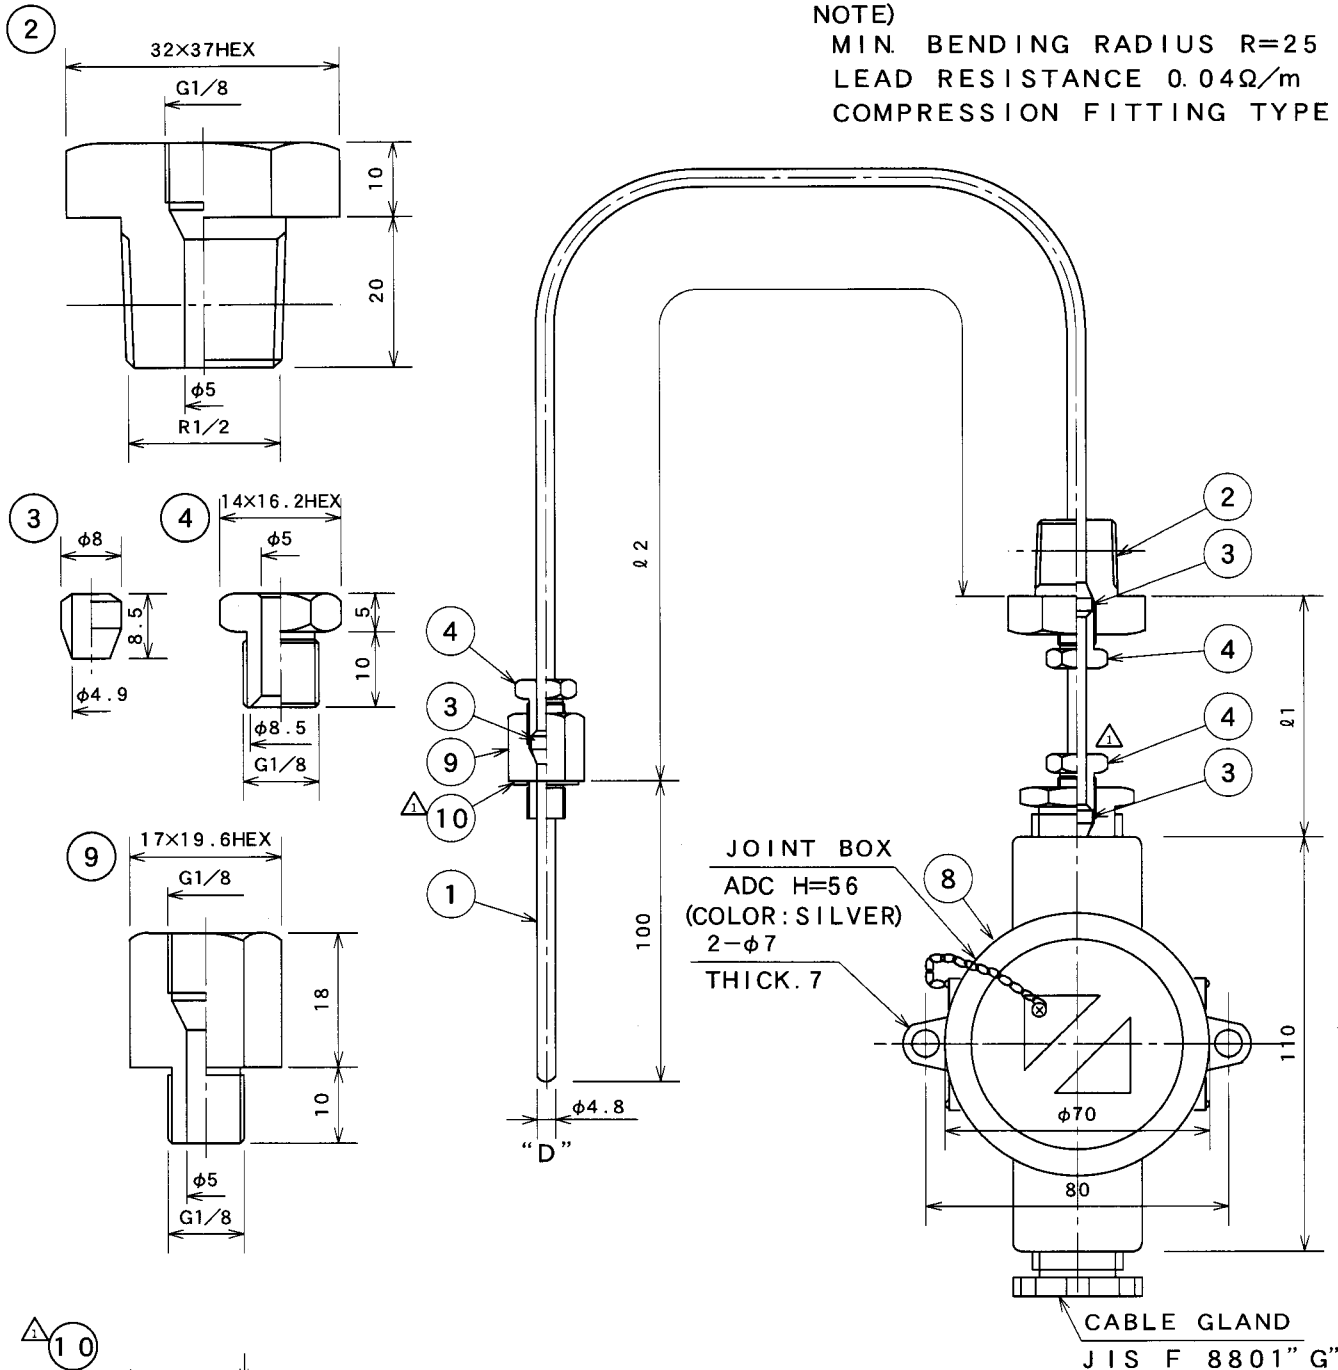

TERMINAL
 端子



Rated Value: Pt100Ω
 抵抗値
 Class : B-JIS' 97
 階級
 Temp : Max 100°C
 温度

MARKS	PARTICULARS	MATERIALS	Q'TY
10	PACKING	Cu	1
9	PLUG	SUS304	1
8	JOINT BOX	ADC1	1
7			
6			
5			
4	BOLT	SUS304	3
3	COTTER	DCuB	3
2	PLUG	SUS304	1
1	PROTECTING TUBE	SUS304	1

FILE PTR-M (P-48022-12A)

DATE	SCALE	3rd ANGLE PROJECTION
'04. 7. 2	N / S	
APPROVED	CHECKED	DRAWN
<i>A. Makino</i>	<i>A. Makino</i>	<i>Y. Takaha</i>
明陽電機株式会社 MEIYO ELECTRIC CO., LTD		

TITLE	DWG. NO.
TYPE PTR-M RESISTANCE BULB	P-48022-12B

REVISION	BY
'04 7.1 ⑩及びグランド構造追記	