

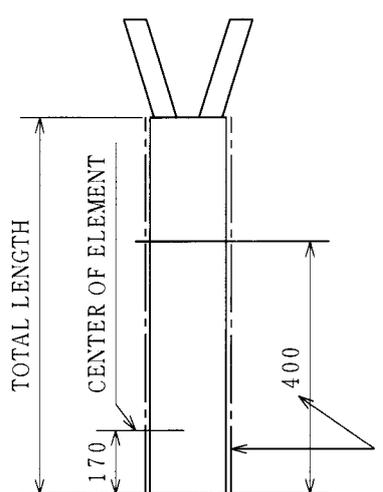


No.	NAME	SPEC. MT'L	REMARKS
1	BASE PLATE & ELEMENT	TYPE: 12001230-A EPOXY RESIN	
2	BASE PLATE CAP	TYPE: 12001230-B EPOXY RESIN	
3	BASE PLATE CASE	TYPE: 12001230-C EPOXY RESIN	
4	GLASS BIND TAPE	PG-402 t 0.33	
5	CAPTON SEAT	K-5EPP t 0.13	DOUBLE SEAMLESS SEAT ROLLED
6	SILICON RUBBER	KE1204A, B	
7	TEFLON WIRE (LEAD)	FEP 0.37mm	
8	SILICON TUBE	φ3 ST-15-DG	
9	GLASS TUBE	SILICON VARNISH GLASS BRAID TUBE	ESG-3 IN DIA 4φ
10	SEMICON PAINT	Sib 8003	BRUSH PAINTED SURFACE AFTER HEATING MOLD

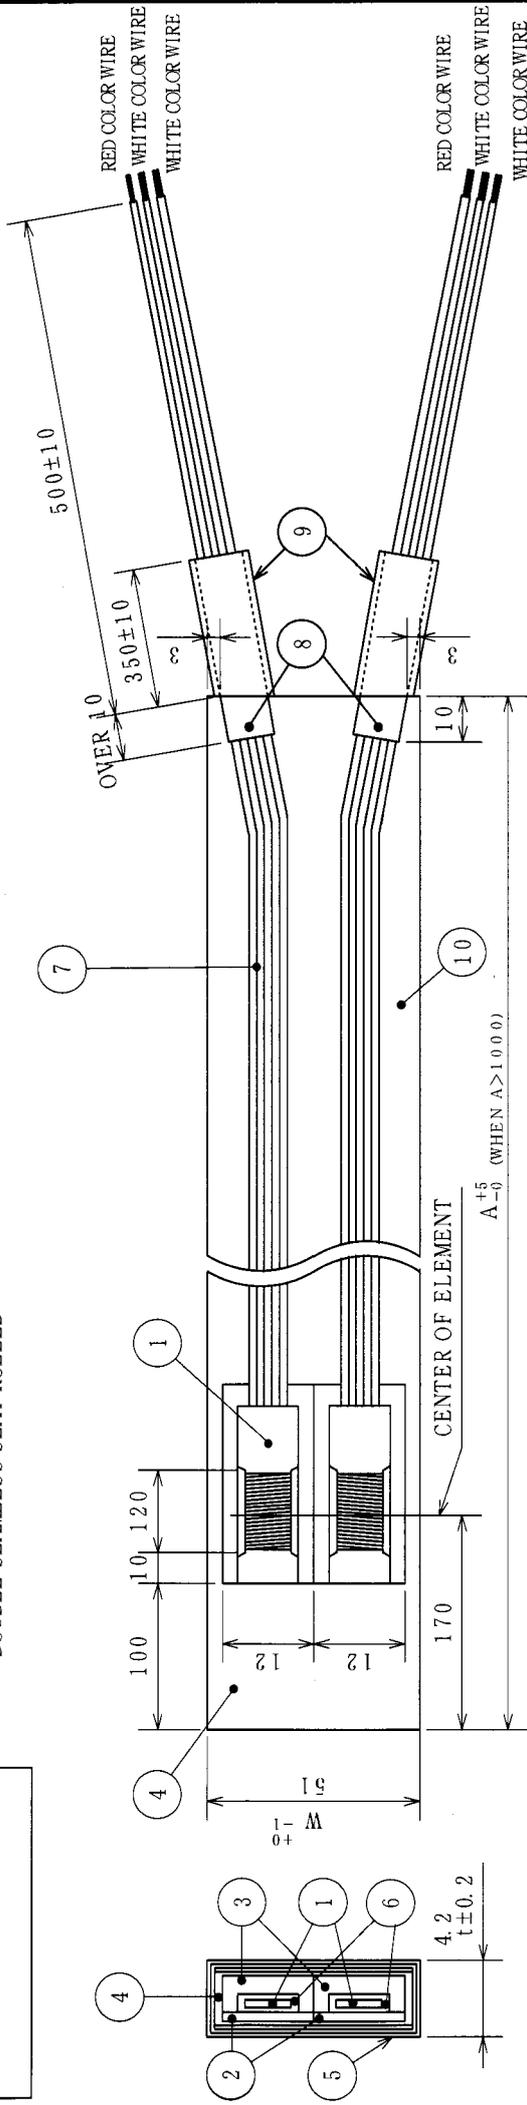

DOUBLE SEAMLESS SEAT ROLLED

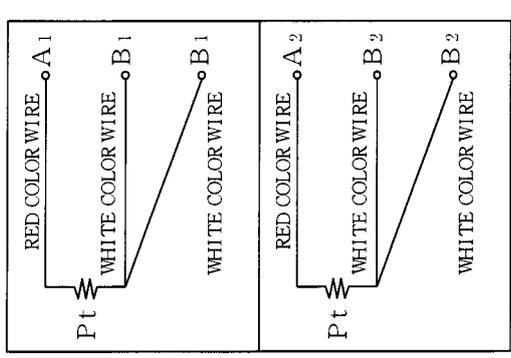

RESISTANCE VALUE : Pt100 $\alpha$ t0 $\pm$ 0.12 $\Omega$   
 JIS C1604-1997 (R100/R0=1.3851)

CLASS : B  
 RATED CURRENT : 2mA  
 MEAS. TEMP. : 0~150 $^{\circ}$ C  
 INSULATION RESISTANCE : 1,000VDC-2,000M $\Omega$   
 HIGH VOLTAGE : 3,000VAC/1 $\phi$

APPROVED	名称 DWG. NAME	図面番号 DWG. NO
CHECKED	PTR-CFG (DOUBLE ELEMENT)	P-77302-100
DRAWING	SEACH COIL RESISTANCE BULB	

MEIYO ELECTRIC CO., LTD.